



MÜLLER
SAFE



KEY SAFES

KEY SAFE MST 0



SECURITY LEVEL

Class 0 to EN 1143-1
certified by ECB-S and VdS



DESIGN

Body: Double-walled
Door: Double-walled
Hinges: Internal
Door opening angle: 90°
Mounting holes: 1 fixing hole in the floor

Also available as a version for car keys (longer hooks).



LOCKING

High security double-bit key lock
2 keys (95 mm)




PAINTING

Light gray, RAL 7035
(special painting according to RAL colors for an extra charge)



KEY SAFE MST 0

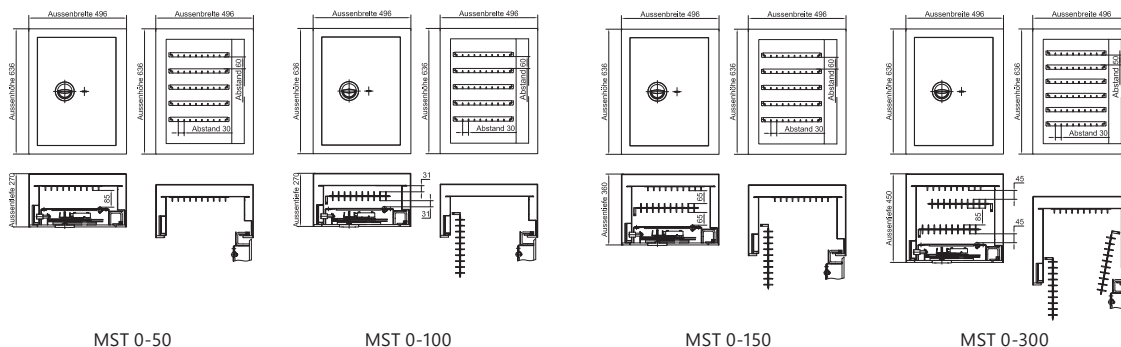

MST 0-50

MST 0-100

MST 0-150

MST 0-300

| Model | External dim. in mm | | | Distribution of the key bars | Number Hooks | Door 1 / 2-leaf | Weight (Kg) |
|-----------|---------------------|-------|-------|--|--------------|-----------------|-------------|
| | Height | Width | Depth | | | | |
| MST 0-50 | 636 | 496 | 270 | 5 bars with 10 hooks each on the back wall | max. 50 | 1-leaf | 85 |
| MST 0-100 | 636 | 496 | 270 | 1 partition wall, 5 strips per side, each with 10 hooks | max. 100 | 1-leaf | 90 |
| MST 0-150 | 636 | 496 | 360 | 5 strips with each 10 hook backwall, 1 partition wall, 5 bars per side with 10 hooks each | max. 150 | 1-leaf | 112 |
| MST 0-300 | 636 | 496 | 450 | 6 strips with 10 hooks each on the back wall; 2 partition walls, per side 6 strips with 10 hooks each | max. 300 | 1-leaf | 126 |



LOCKING OPTIONS

| Model | Standardlocking | | Optional locking systems | | |
|-----------|---------------------|-----------------------------|-----------------------------|------------------------------|--|
| | Double-bit key lock | Mechanical combination lock | Elektronic combination lock | Elektronic combination lock* | Double lock** (2 Double-bit key locks) |
| MST 0-50 | ■ | ■ | ■ | ■ | ■ |
| MST 0-100 | ■ | ■ | ■ | ■ | ■ |
| MST 0-150 | ■ | ■ | ■ | ■ | ■ |
| MST 0-300 | ■ | ■ | ■ | ■ | ■ |

* with emergency key, protruding approx 25 mm **other lock combinations possible



ACCESSORIES FOR EXTRA CHARGE

| Model | Base (closed) up to a height of 900 mm | Left door hinge | Additional fixing hole for designated position Ø = 13 mm | Spezial fixing kit for concrete floor |
|-----------|--|-----------------|--|---------------------------------------|
| MST 0-50 | ■ | ■ | ■ | ■ |
| MST 0-100 | ■ | ■ | ■ | ■ |
| MST 0-150 | ■ | ■ | ■ | ■ |
| MST 0-300 | ■ | ■ | ■ | ■ |

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

Müller Safe GmbH

In der Hirtenwiese 6

35745 Herborn, Germany

www.mueller-safe.de

