





DEPOSIT/BANK EQUIPMENT



DEPOSIT SAFE MD III













Model MD III-130V



SECURITY LEVEL Class D-III according to EN 1143-2

certified by ECB·S

DESIGN Body: Multi-walled

> Door: Multi-walled Hinges: External

Door opening angle: 180° Handle/fitting: Protruding 35 mm

Mounting holes: 4 fixing holes in the floor, 1 in the backwall*

(*not drilled through)

LOCKING

High security double-bit key lock

2 keys (135 mm)

PAINTING Light gray, RAL 7035

(special painting according to RAL colors for an extra charge)

INSURABLE Individual agreement

DEPOSIT SAFE MD III











Model	Extern Height	al dim Widtl	n. in mm n Depth	Interna Height	al dim. Width	in mm Depth	Door Height	light Width	Drawer	Weight (Kg)
MD III-95V	950	590	550	265	480	390	496	473	front	500
MD III-130V	1300	590	550	615	480	390	846	473	front	634
MD III-95R	950	590	550	265	480	390	496	473	on the back	504
MD III-130R	1300	590	550	615	480	390	846	473	on the back	640
MD III-95	950	590	550+270	265	480	390	496	473	protruding 270mm on the back	560
MD III-130	1300	590	550+270	615	480	390	846	473	protruding 270mm on the back	720


Fittings protrude 35 mm

LOCKING OPTIONS

	Standardlocking	Optional locking systems					
Model	Double-bit key lock	Mechanical combination lock	Electronic combination lock	Electronic combination lock*			
MD III-95V		- Combination lock	- Combination lock	E COMBINATION IOCK			
MD III-130V	-	-	•				
MD III-95R	-	•	•	•			
MD III-130R	•	•		•			
MD III-95	•		•	•			
MD III-130	•	•	•	•			

^{*} with emergency key

MD III-130

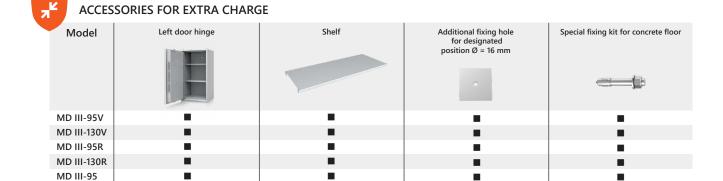

 $As of 01/2022 - decorative \ material \ not \ included \ in \ the \ scope \ of \ delivery- \ Technical \ changes \ reserved.$

