



MÜLLER  
SAFE



KEY SAFES

## KEY SAFE MST I



### SECURITY LEVEL

Class I to EN 1143-1  
certified by ECB-S and VdS



### DESIGN

**Body:** Double-walled  
**Door:** Double-walled  
**Hinges:** Internal  
**Door opening angle:** 90°  
**Mounting holes:** 1 fixing hole in the door

Also available as a version for car keys (longer hooks).



### LOCKING

High security double-bit key lock  
2 keys (95 mm)




### PAINTING

Light gray, RAL 7035  
(special painting according to RAL colors for an extra charge)



# KEY SAFE MST I

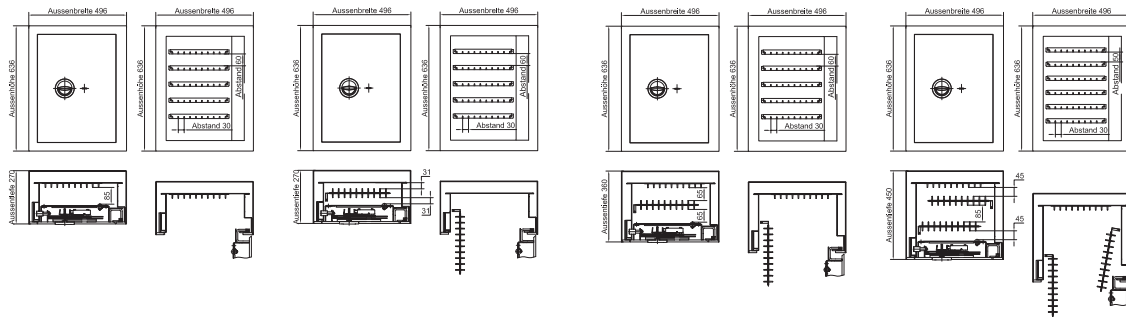

MST I-50

MST I-100

MST I-150

MST I-300

Model	External dim. in mm			Distribution of the key bars	Number Hooks	Door 1 / 2-leaf	Weight (Kg)
	Height	Width	Depth				
MST I-50	636	496	270	5 bars with 10 hooks each on the back wall	max. 50	1-leaf	85
MST I-100	636	496	270	1 partition wall, 5 strips per side, each with 10 hooks	max. 100	1-leaf	90
MST I-150	636	496	360	5 strips with each 10 hook backwall, 1 partition wall, 5 bars per side with 10 hooks each	max. 150	1-leaf	112
MST I-300	636	496	450	6 strips with 10 hooks each on the back wall; 2 partition walls, per side 6 strips with 10 hooks each	max. 300	1-leaf	126



## LOCKING OPTIONS

	Standardlocking	Optional locking systems			
Model	Double-bit key lock	Mechanical combination lock	Elektronic combination lock	Elektronic combination lock*	Double lock** (2 Double-bit key locks)
MST 0-50	■	■	■	■	■
MST 0-100	■	■	■	■	■
MST 0-150	■	■	■	■	■
MST 0-300	■	■	■	■	■

\* with emergency key, protruding approx 25 mm \*\*other lock combinations possible



## ACCESSORIES FOR EXTRA CHARGE

Model	Base (closed) up to a height of 900 mm	Left door hinge	Additional fixing hole for designated position Ø = 13 mm	Spezial fixing kit for concrete floor
MST I-50	■	■	■	■
MST I-100	■	■	■	■
MST I-150	■	■	■	■
MST I-300	■	■	■	■

As of 12/2020 - decorative material not included in the scope of delivery- Technical changes reserved.



KEY SAFES

**Müller Safe GmbH**

In der Hirtenwiese 6

35745 Herborn, Germany

[www.mueller-safe.de](http://www.mueller-safe.de)

